
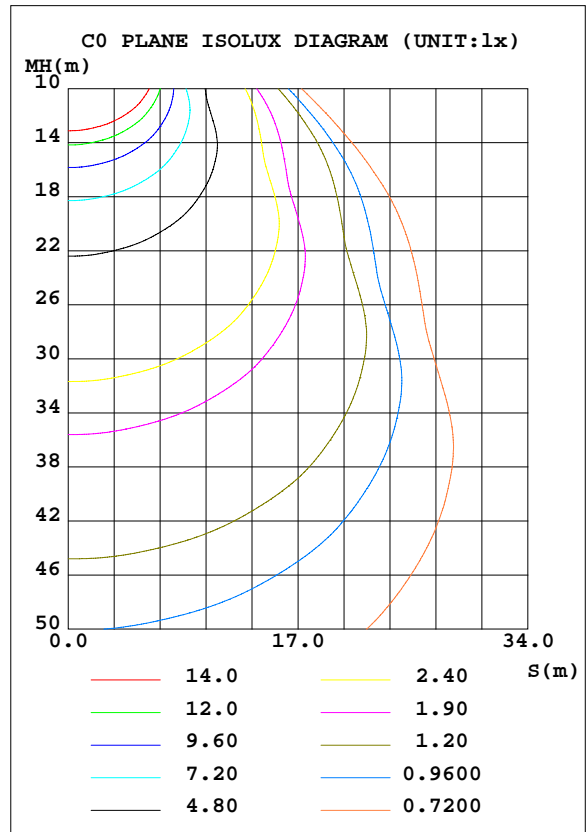


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm		
NAME: Floor Light	TYPE:STM	WEIGHT:
SPEC.:4500K	DIM.:	SERIAL No.:1
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD	SUR.:0.25*0.55	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 96.64 lm/W			
MODEL	CON-P-F-001	I _{max} (cd)	2445	S/MH(C0/180)	1.35
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.40
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	6302.6	η UP, DN(C0-180)	0.4,48.6
NOMINAL FLUX(lm)	6302.56	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.5,50.5
LAMPS INSIDE	1	η up(%)	0.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220.1	η down(%)	99.1	CIBSE SHR MAX	1.35

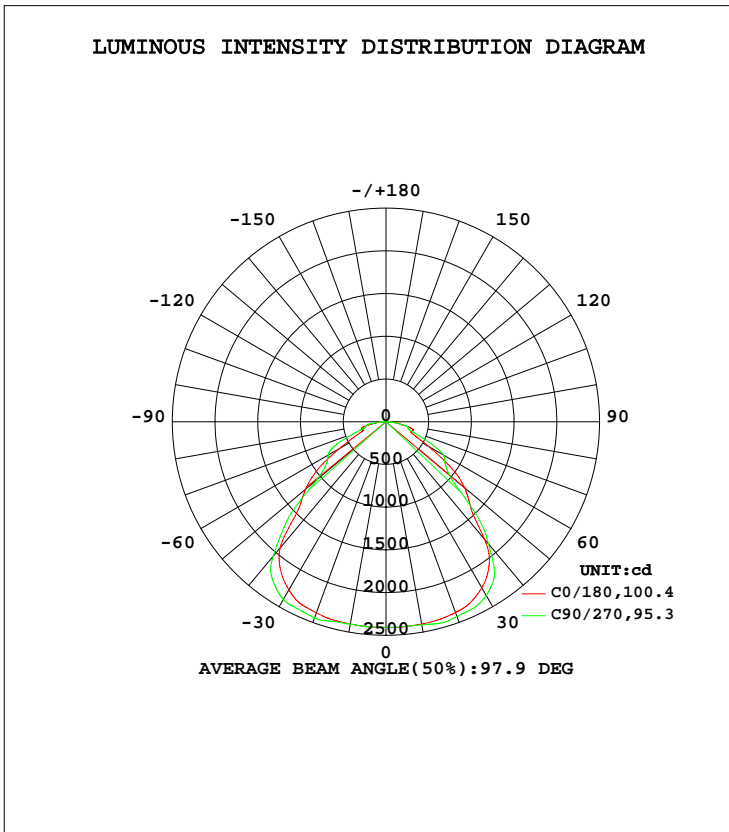

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Chen
 Test Date:2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:8.700m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2404	2411	2414	2407	2403	2405	2406	2403	0- 10	229.7	229.7	3.65,3.65
20	2376	2396	2426	2396	2380	2409	2443	2406	10- 20	683.4	913.2	14.5,14.5
30	2243	2281	2347	2294	2272	2323	2402	2300	20- 30	1095	2008	31.9,31.9
40	1793	1770	1866	1853	1927	2008	2056	1907	30- 40	1350	3358	53.3,53.3
50	1201	1173	969.5	1194	1229	1241	1053	1139	40- 50	1134	4492	71.3,71.3
60	567.3	742.7	777.1	769.4	632.0	842.8	779.4	809.9	50- 60	833.8	5326	84.5,84.5
70	324.3	409.0	308.8	402.9	286.8	430.8	392.0	430.9	60- 70	526.5	5852	92.9,92.9
80	176.0	145.7	187.0	140.4	192.2	175.0	227.6	175.9	70- 80	302.4	6155	97.7,97.7
90	2.023	2.283	2.050	2.286	3.609	6.778	7.995	4.902	80- 90	89.03	6244	99.1,99.1
100	3.312	3.516	3.535	3.365	3.866	3.909	3.952	4.037	90-100	3.194	6247	99.1,99.1
110	5.329	5.675	5.873	5.471	6.220	6.282	6.495	6.433	100-110	5.045	6252	99.2,99.2
120	7.872	8.198	8.454	7.995	9.052	9.081	9.440	9.284	110-120	7.241	6259	99.3,99.3
130	10.35	10.93	11.14	10.65	11.81	11.89	12.25	12.04	120-130	8.992	6268	99.5,99.5
140	12.71	13.04	13.28	13.01	14.19	14.32	14.37	14.18	130-140	9.694	6278	99.6,99.6
150	15.08	15.29	15.50	15.44	16.31	16.48	16.38	16.17	140-150	9.226	6287	99.8,99.8
160	17.97	18.00	18.34	18.18	18.67	18.82	18.74	18.42	150-160	7.859	6295	99.9,99.9
170	20.65	20.66	21.30	20.67	20.95	21.01	21.31	20.69	160-170	5.543	6301	100,100
180	21.96	21.98	22.57	21.80	21.97	21.99	22.57	21.84	170-180	2.043	6303	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3973.8 lm

%lum = 63.1%
%lamp = 63.1%

Conical surface Flux(120deg): 5325.8 lm


%lum = 84.5%
%lamp = 84.5%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Chen
Test Date:2017-11-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
Humidity:65.0%
Test Distance:8.700m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm		
NAME: Floor Light	TYPE:STM	WEIGHT:
SPEC.:4500K	DIM.:	SERIAL No.:1
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD	SUR.:0.25*0.55	Shielding Angle:

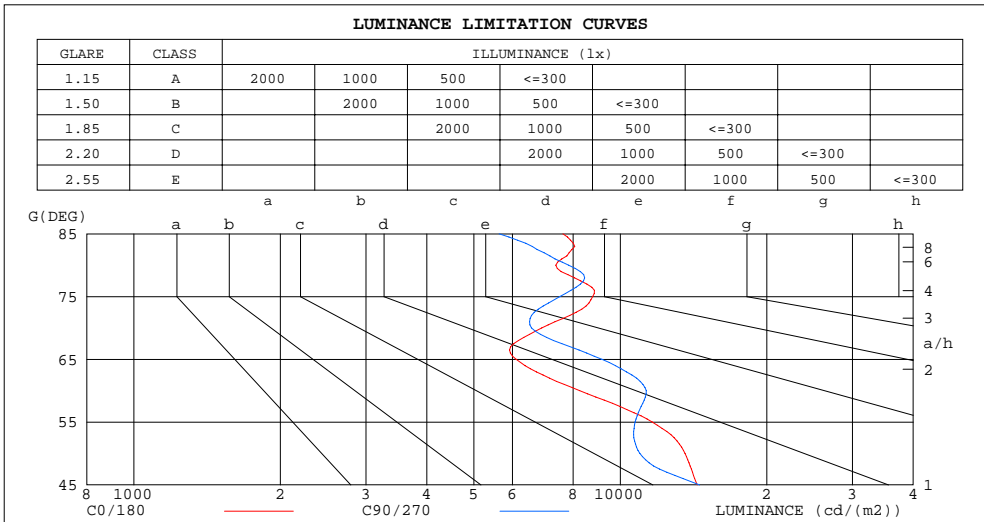

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7619	5634
80	7370	7832
75	8774	7512
70	6895	6567
65	6105	9168
60	8252	11303
55	11630	10725
50	13583	10969
45	14387	14552


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Chen
 Test Date:2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:8.700m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm		
NAME: Floor Light	TYPE:STM	WEIGHT:
SPEC.:4500K	DIM.:	SERIAL No.:1
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD	SUR.:0.25*0.55	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.94	.92	.90	.91	.89	.87	.85
2.0	.93	.87	.82	.91	.85	.80	.87	.83	.78	.84	.80	.77	.81	.78	.75	.73
3.0	.83	.75	.69	.81	.74	.68	.78	.72	.67	.75	.70	.66	.73	.68	.65	.62
4.0	.74	.66	.59	.73	.65	.59	.70	.63	.58	.68	.62	.57	.65	.60	.56	.54
5.0	.66	.58	.52	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.54	.50	.48
6.0	.60	.52	.46	.59	.51	.45	.57	.50	.45	.56	.49	.45	.54	.48	.44	.42
7.0	.55	.46	.41	.54	.46	.40	.52	.45	.40	.51	.45	.40	.49	.44	.39	.38
8.0	.50	.42	.36	.49	.42	.36	.48	.41	.36	.47	.40	.36	.46	.40	.36	.34
9.0	.46	.38	.33	.46	.38	.33	.44	.37	.33	.43	.37	.32	.42	.36	.32	.30
10.0	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.39	.33	.29	.28

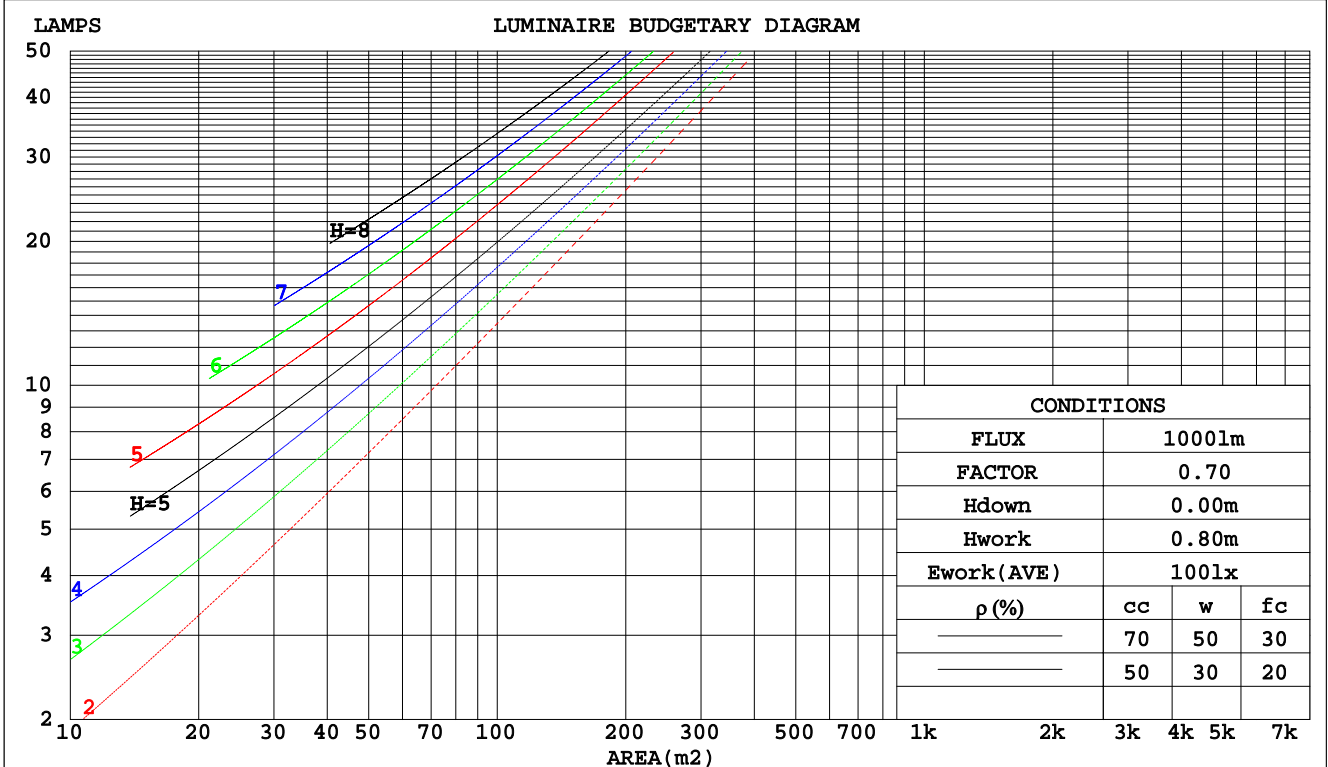

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Chen
 Test Date:2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:8.700m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm		
NAME: Floor Light	TYPE:STM	WEIGHT:
SPEC.:4500K	DIM.:	SERIAL No.:1
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD	SUR.:0.25*0.55	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.279	.159	.050	.272	.155	.049	.258	.148	.047	.246	.142	.046	.234	.136	.044	
2.0	.265	.145	.045	.259	.142	.044	.247	.137	.043	.236	.132	.041	.226	.128	.040	
3.0	.248	.132	.039	.242	.130	.039	.232	.125	.038	.222	.122	.037	.213	.118	.036	
4.0	.231	.120	.035	.226	.118	.035	.216	.115	.034	.208	.112	.034	.200	.108	.033	
5.0	.215	.110	.032	.211	.108	.031	.202	.105	.031	.195	.103	.031	.187	.100	.030	
6.0	.201	.101	.029	.197	.099	.029	.190	.097	.028	.183	.095	.028	.176	.093	.028	
7.0	.188	.093	.026	.185	.092	.026	.178	.090	.026	.172	.088	.026	.166	.086	.025	
8.0	.177	.086	.024	.174	.085	.024	.168	.084	.024	.162	.082	.024	.157	.080	.023	
9.0	.166	.081	.022	.164	.080	.022	.158	.078	.022	.153	.077	.022	.148	.075	.022	
10.0	.157	.075	.021	.155	.075	.021	.150	.073	.021	.145	.072	.020	.141	.071	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.185	.164	.144	.159	.140	.124	.108	.097	.086	.062	.056	.050	.020	.018	.016	
2.0	.176	.139	.108	.151	.120	.094	.103	.083	.065	.060	.048	.038	.019	.016	.012	
3.0	.167	.121	.085	.144	.105	.073	.099	.073	.052	.057	.042	.030	.018	.014	.010	
4.0	.160	.108	.068	.137	.093	.059	.094	.065	.042	.054	.038	.025	.018	.012	.008	
5.0	.152	.097	.057	.131	.084	.049	.090	.059	.035	.052	.035	.021	.017	.011	.007	
6.0	.145	.089	.048	.125	.077	.042	.086	.054	.030	.050	.032	.018	.016	.010	.006	
7.0	.139	.082	.042	.119	.071	.037	.082	.050	.026	.048	.029	.015	.015	.010	.005	
8.0	.133	.076	.037	.114	.066	.032	.079	.046	.023	.046	.027	.014	.015	.009	.005	
9.0	.127	.071	.033	.109	.062	.029	.076	.043	.021	.044	.026	.012	.014	.008	.004	
10.0	.122	.067	.031	.105	.058	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Chen
 Test Date:2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:8.700m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm										
NAME: Floor Light					TYPE:STM			WEIGHT:		
SPEC.:4500K					DIM.:			SERIAL No.:1		
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD					SUR.:0.25*0.55			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.0	15.4	14.3	15.6	15.8	14.6	16.0	14.9	16.2	16.4
3H	14.7	16.0	15.0	16.3	16.5	15.4	16.7	15.7	16.9	17.2
4H	15.3	16.5	15.6	16.8	17.1	15.8	17.0	16.1	17.3	17.6
6H	15.8	16.9	16.1	17.2	17.5	16.2	17.4	16.5	17.6	17.9
8H	15.9	17.1	16.3	17.3	17.6	16.3	17.4	16.7	17.7	18.0
12H	16.1	17.1	16.4	17.4	17.8	16.4	17.4	16.7	17.8	18.1
4H 2H	14.5	15.7	14.8	16.0	16.2	14.9	16.2	15.3	16.4	16.7
3H	15.4	16.5	15.8	16.8	17.1	16.0	17.1	16.4	17.4	17.7
4H	16.1	17.1	16.5	17.4	17.8	16.6	17.6	17.0	17.9	18.3
6H	16.7	17.6	17.1	18.0	18.3	17.1	18.0	17.5	18.4	18.7
8H	17.0	17.8	17.4	18.1	18.5	17.3	18.1	17.7	18.5	18.9
12H	17.1	17.9	17.6	18.3	18.7	17.4	18.1	17.8	18.5	19.0
8H 4H	16.4	17.2	16.8	17.5	17.9	16.8	17.6	17.2	18.0	18.4
6H	17.1	17.8	17.6	18.2	18.6	17.4	18.1	17.9	18.5	19.0
8H	17.4	18.0	17.9	18.4	18.9	17.7	18.3	18.2	18.7	19.2
12H	17.7	18.2	18.1	18.6	19.1	17.9	18.4	18.3	18.8	19.3
12H 4H	16.4	17.1	16.8	17.5	17.9	16.8	17.5	17.2	17.9	18.3
6H	17.1	17.7	17.6	18.2	18.6	17.5	18.1	17.9	18.5	19.0
8H	17.5	18.0	18.0	18.4	18.9	17.8	18.3	18.2	18.7	19.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				
1.5H	+ 0.1 / - 0.1					+ 0.3 / - 0.6				
2.0H	+ 0.5 / - 0.7					+ 0.5 / - 0.7				

CIE Pub.117, 6303 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 6.4)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Chen
 Test Date:2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:8.700m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm		
NAME: Floor Light	TYPE:STM	WEIGHT:
SPEC.:4500K	DIM.:	SERIAL No.:1
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD	SUR.:0.25*0.55	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	62	52	45	62	52	45	61	51	45	39
0.80	72	62	55	71	61	55	70	61	55	48
1.00	80	71	64	79	70	64	77	71	63	56
1.25	87	78	71	86	77	71	83	76	70	63
1.50	92	83	77	90	82	76	87	80	75	68
2.00	98	90	85	96	89	84	93	87	82	75
2.50	101	94	89	99	93	88	95	90	86	78
3.00	104	98	93	102	96	92	98	93	90	81
4.00	108	103	98	105	101	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Chen
 Test Date:2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:8.700m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm		
NAME: Floor Light	TYPE:STM	WEIGHT:
SPEC.:4500K	DIM.:	SERIAL No.:1
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD	SUR.:0.25*0.55	Shielding Angle:

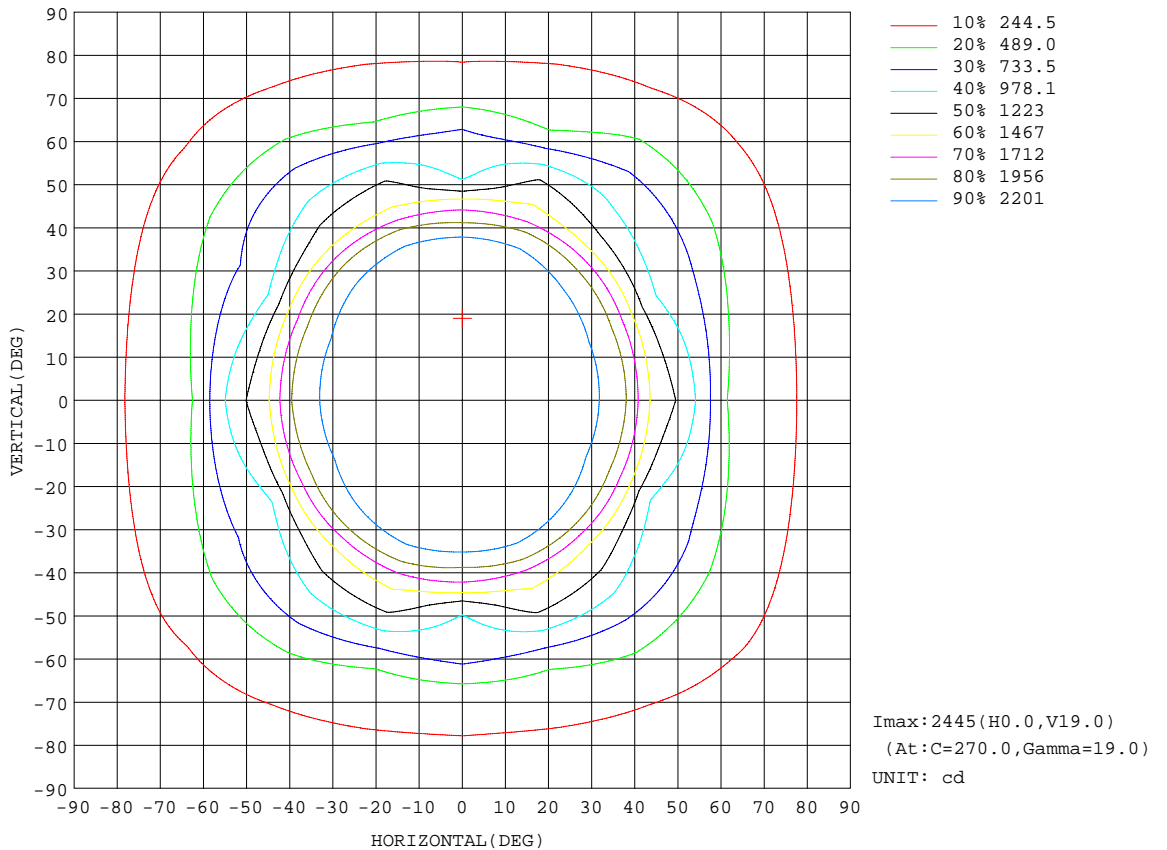


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Chen
 Test Date: 2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0000]
 Remarks:

AAI Figure

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm		
NAME: Floor Light	TYPE:STM	WEIGHT:
SPEC.:4500K	DIM.:	SERIAL No.:1
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD	SUR.:0.25*0.55	Shielding Angle:

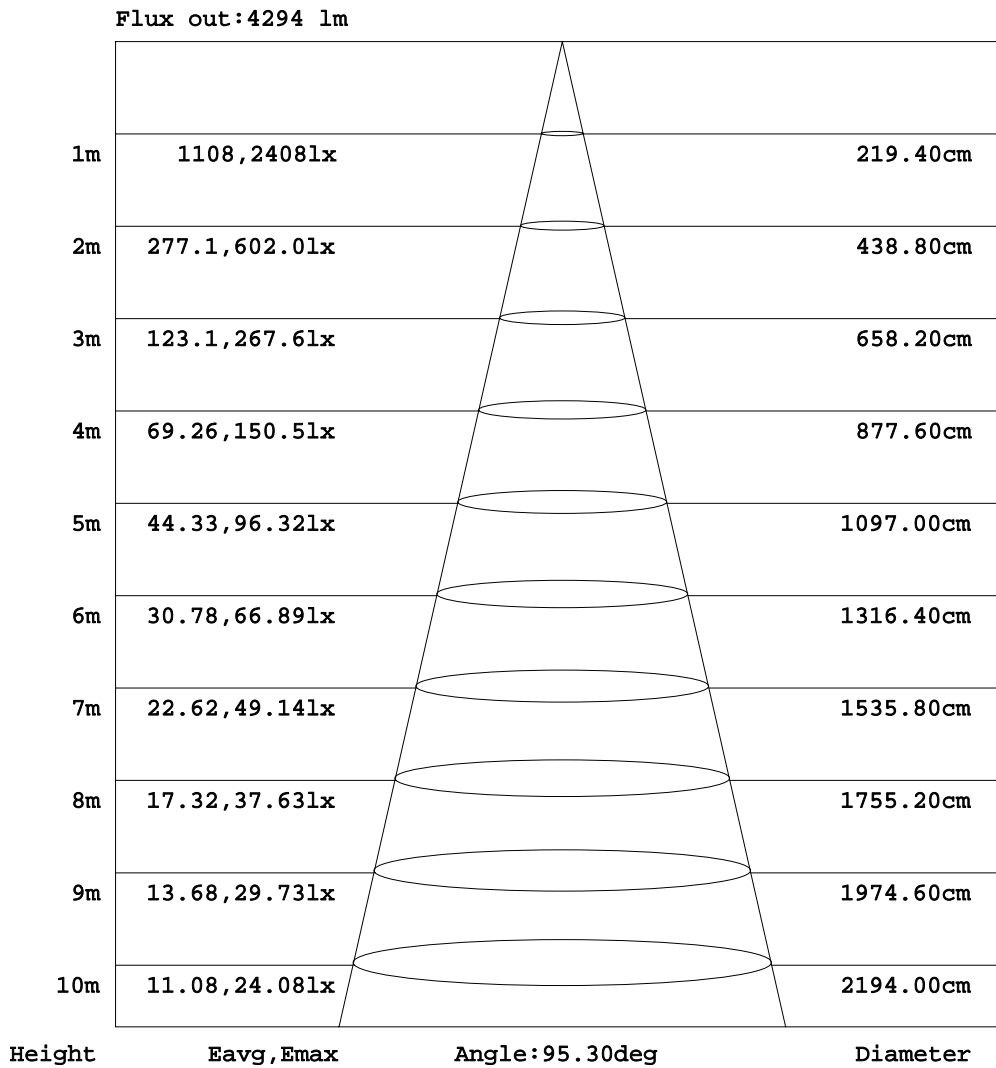


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Chen
 Test Date:2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:8.700m [K=1.0000]
 Remarks:

Planar Illuminance Curve

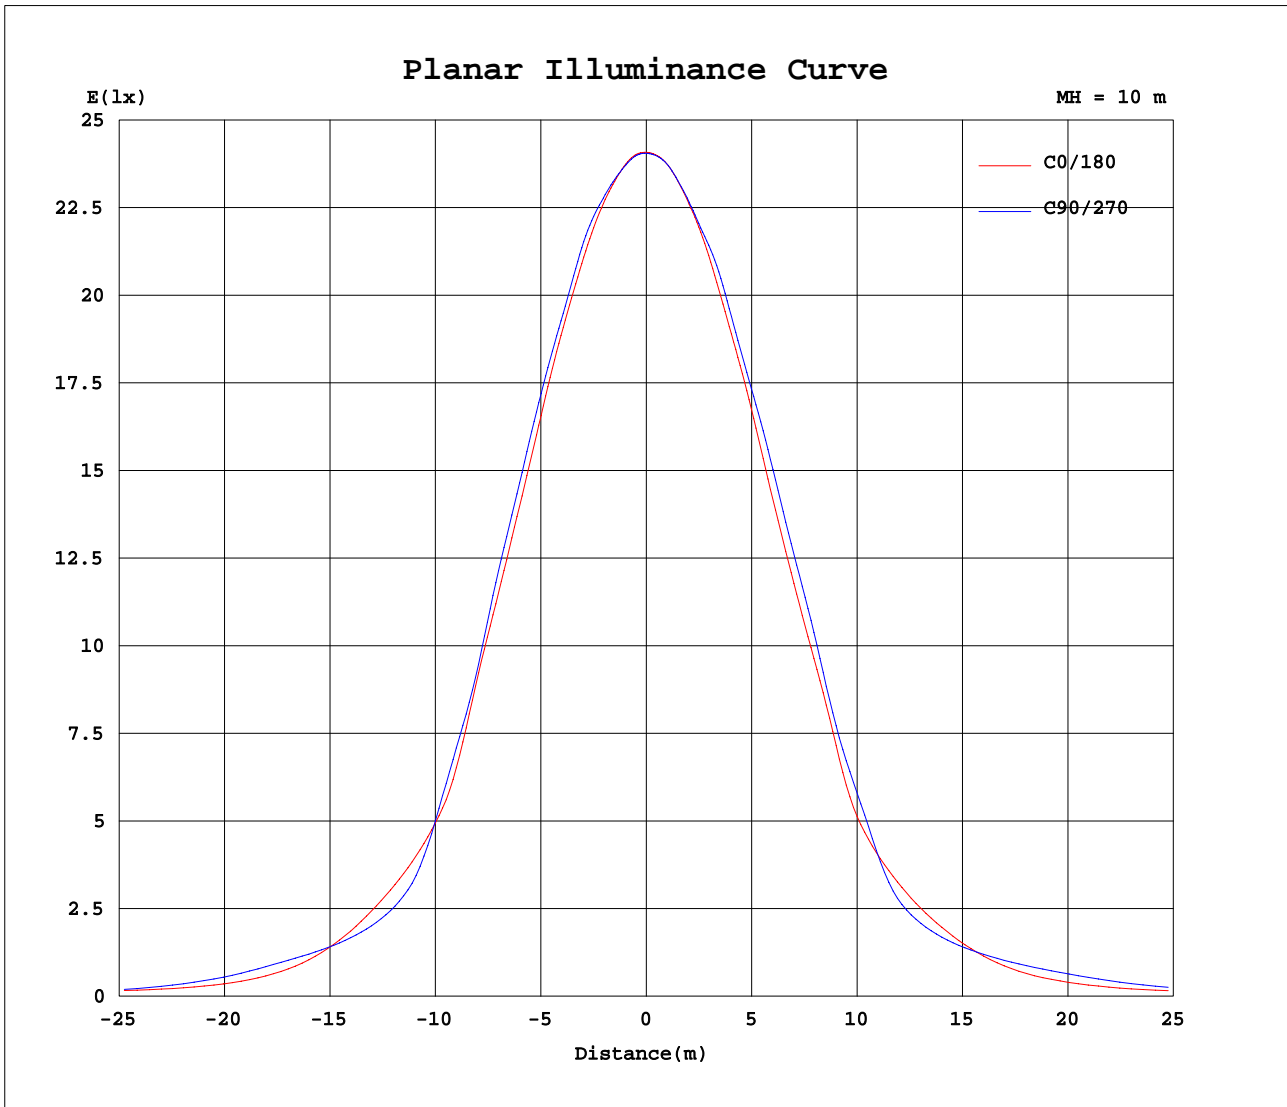

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Chen
 Test Date: 2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.4V I:0.3103A P:65.22W PF:0.9579 Freq:49.99Hz Lamp Flux:6302.56x1 lm		
NAME: Floor Light	TYPE:STM	WEIGHT:
SPEC.:4500K	DIM.:	SERIAL No.:1
MFR.: SHENZHEN CONCEPT LIGHTING CO.,LTD	SUR.:0.25*0.55	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2408	2407	2407	2406	2405	2405	2404	2404	2408	2407	2407	2406	2405	2405	2404	2404			
5	2409	2409	2408	2407	2406	2405	2406	2406	2409	2410	2410	2410	2409	2408	2407	2406			
10	2404	2408	2411	2413	2414	2411	2407	2404	2403	2403	2405	2407	2406	2407	2403	2400			
15	2398	2416	2415	2422	2441	2423	2410	2413	2402	2406	2413	2415	2419	2412	2417	2405			
20	2376	2381	2396	2418	2426	2420	2396	2389	2380	2398	2409	2421	2443	2412	2406	2382			
25	2337	2329	2356	2400	2409	2403	2365	2341	2354	2353	2382	2421	2422	2416	2369	2336			
30	2243	2237	2281	2333	2347	2338	2294	2262	2272	2286	2323	2376	2402	2368	2300	2254			
35	2095	2085	2140	2209	2210	2220	2168	2122	2144	2150	2227	2292	2295	2269	2177	2110			
40	1793	1725	1770	1872	1866	1922	1853	1823	1927	1897	2008	2097	2056	2066	1907	1790			
45	1399	1242	1396	1504	1415	1520	1415	1327	1451	1416	1507	1597	1640	1598	1427	1312			
50	1201	898	1173	1299	969	1297	1194	917	1229	975	1241	1352	1053	1374	1139	968			
55	917	783	961	1014	846	1012	961	781	976	783	1005	1107	851	1119	960	831			
60	567	714	743	699	777	706	769	707	632	702	843	820	779	758	810	716			
65	355	511	535	468	533	460	540	548	388	577	617	545	657	464	608	542			
70	324	325	409	400	309	382	403	361	287	386	431	391	392	357	431	385			
75	312	264	277	311	267	319	282	258	298	273	314	339	252	338	306	282			
80	176	181	146	172	187	177	140	183	192	191	175	197	228	195	176	177			
85	91.3	69.6	64.5	72.5	67.5	74.5	63.4	69.6	93.9	76.7	82.8	89.4	96.6	93.5	83.0	77.3			
90	2.02	2.02	2.28	2.34	2.05	2.34	2.29	2.62	3.61	4.94	6.78	7.26	7.99	6.13	4.90	3.07			
95	2.56	2.66	2.69	2.75	2.63	2.72	2.56	2.47	2.98	2.93	3.00	3.03	2.98	3.07	3.08	3.03			
100	3.31	3.46	3.52	3.62	3.54	3.54	3.36	3.21	3.87	3.81	3.91	4.00	3.95	4.06	4.04	3.96			
105	4.28	4.37	4.50	4.64	4.62	4.51	4.35	4.15	4.95	4.91	5.01	5.12	5.14	5.15	5.14	5.12			
110	5.33	5.52	5.68	5.85	5.87	5.67	5.47	5.25	6.22	6.21	6.28	6.40	6.50	6.47	6.43	6.44			
115	6.54	6.76	6.91	7.13	7.15	6.93	6.71	6.48	7.61	7.59	7.67	7.83	7.94	7.91	7.86	7.87			
120	7.87	8.09	8.20	8.36	8.45	8.20	7.99	7.78	9.05	9.07	9.08	9.25	9.44	9.32	9.28	9.35			
125	9.13	9.39	9.53	9.69	9.86	9.56	9.32	9.14	10.5	10.6	10.5	10.7	10.9	10.8	10.7	10.8			
130	10.3	10.6	10.9	10.9	11.1	10.9	10.6	10.5	11.8	12.0	11.9	12.1	12.3	12.1	12.0	12.0			
135	11.5	11.8	12.0	12.1	12.2	12.1	11.9	11.7	13.1	13.2	13.2	13.3	13.4	13.2	13.2	13.2			
140	12.7	12.9	13.0	13.2	13.3	13.1	13.0	12.9	14.2	14.3	14.3	14.4	14.4	14.3	14.2	14.2			
145	13.9	14.0	14.1	14.2	14.3	14.3	14.2	14.0	15.3	15.4	15.4	15.4	15.4	15.2	15.2	15.3			
150	15.1	15.2	15.3	15.3	15.5	15.5	15.4	15.2	16.3	16.5	16.5	16.5	16.4	16.1	16.2	16.3			
155	16.4	16.5	16.6	16.5	16.8	16.8	16.8	16.5	17.4	17.6	17.6	17.6	17.5	17.2	17.2	17.4			
160	18.0	18.0	18.0	18.0	18.3	18.3	18.2	17.9	18.7	18.7	18.8	18.9	18.7	18.4	18.4	18.7			
165	19.4	19.5	19.4	19.5	19.9	19.9	19.6	19.2	19.9	19.8	20.0	20.2	20.1	19.6	19.6	19.8			
170	20.7	20.7	20.7	20.8	21.3	21.1	20.7	20.4	21.0	20.8	21.0	21.2	21.3	20.8	20.7	20.8			
175	21.5	21.5	21.5	21.8	22.2	21.8	21.4	21.2	21.7	21.5	21.8	21.8	22.2	21.7	21.5	21.5			
180	22.0	21.9	22.0	22.2	22.6	22.2	21.8	21.7	22.0	21.9	22.0	22.2	22.6	22.1	21.8	21.7			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Chen
 Test Date:2017-11-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:8.700m [K=1.0000]
 Remarks: